

Data sheet

WDS® Flexipor®

ENGLISH

Metric information - Page 2
Imperial information - Page 3

Description

WDS® Flexipor® is a microporous insulation material which has an extremely low thermal conductivity coefficient giving it very good insulating properties. WDS® Flexipor® is produced with temperature resistant soluble paper on both sides which is then wrapped in PE film, this enhances the flexibility purposes of the product.

WDS® Flexipor® is designed with no gaps. This has a significant improvement on insulation due to decrease in heat transition. It can be used up to a maximum application temperature of 1050°C (1922°F). WDS® Flexipor® consists of inorganic silicates. The main constituent is fumed silica; the other components are opacifiers to minimize infrared radiation and reinforce glass filaments.

WDS® Flexipor® (core material) is not flammable and meets the requirements of IMO FTPC and DIN EN 13501-1, part 1 class A1.

Application

Tried and tested applications for WDS® Flexipor® include back-up insulation in the steel and non-ferrous metals industry.


Typical applications

WDS® Flexipor® is also successfully used as insulation material in the following areas:

- Heat treatment systems for metals
- Heat treatment systems for glass
- Fire protection equipment
- Electronic devices
- Metrology and instrumentation
- Plant construction parts
- Parts in the automotive industry
- Chimneys, pipes and diesel exhaust systems

Advantages of WDS® Flexipor®

- Controls energy emissions, precisely
- Reduces weight and volume
- Increases heat retention
- Increases effective volume

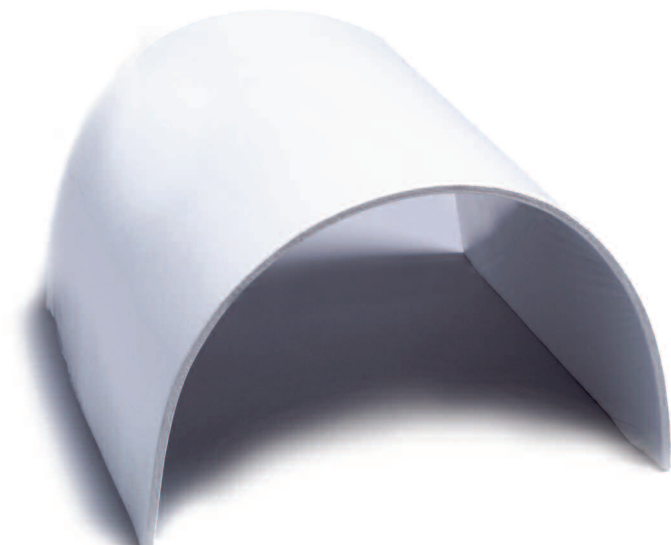

Thermal Shock Resistance

WDS® Flexipor® is insensitive to high and low temperature thermal shocks.

Form of delivery

Standard sizes:

- 300mm x 300mm
(12 inch x 12 inch)
- 500mm x 300mm
(20 inch x 12 inch)
- 600mm x 500mm
(24 inch x 20 inch)
- 1000mm x 600mm
(39 inch x 24 inch)

Special formats available on request

Standard thicknesses:

- 5mm, 7mm, 9mm, 10mm, 12mm
(0.2 inch, 0.28 inch, 0.35 inch, 0.39 inch, 0.47 inch)
- * only 5mm, 7mm, 9mm
- ** additional 12mm
- Tolerances acc. to DIN ISO 2768
- Tolerance class "c", coarse
- Thickness ± 1,0mm

Restrictions on Applications

WDS® Flexipor® has a non-porous surface therefore it is sensitive to all liquids that can wet it; this includes substances such as water, oil and petroleum spirit, since they can destroy the pore structure. Due to the reasons above, please ensure that the film is not damaged before or during the installation. Damaged edges must be protected with an AL-adhesive tape.

Shelf life

- WDS® Flexipor® has unlimited shelf life if it stored properly
- WDS® Flexipor® must be handled and stored in dry conditions.
- WDS® Flexipor® is resistant to diffusion by atmospheric humidity (water vapor).

Composition

Silicon dioxide	SiO ₂	approx. 50%
Zirconium	ZrSiO ₄	approx. 45%
Others		approx. 5%

Safety directions

WDS® Flexipor is not a hazardous substance according to the EU Directive 2006/1907/EEC. The fibers used for mechanical reinforcement have a diameter of > 5 µm; therefore they are not respirable (in accordance to the WHO definition). WDS® Flexipor® does not use any dangerous decomposition substances and according to current knowledge, it does not cause any problems to human health or the environment.

Data sheet

WDS® Flexipor®

Metric information

Physical properties		
Colour		White
Nominal density kg/m ³		280 - 350
Classification temperature °C		1100
Recommended temperature of use °C (core material)		1050
Linear shrinkage % exposed on single side AAW 906-00 12hrs 1000°C		0.6
Linear shrinkage % 24hrs full soak		
	@950°C	1.7
	@1000°C	3.6
Compressive strength MPa ASTM C165 @RT		0.607
Specific heat capacity kJ/kg·K DIN 51007 @700°C		0.902
Thermal conductivity W/m·K ASTM C177		
	@22.5°C	0.022
	@200°C	0.023
	@400°C	0.027
	@600°C	0.034
	@800°C	0.046

The above data are only intended as a guide and should not be used in preparing specifications.

Contact

Europe:

Telephone:
+44 (0) 151 334 4030

E-mail:
marketing.tc@morganplc.com

North America:

Telephone:
+1 (706) 796 4200

E-mail:
northamerica.tc@morganplc.com

South America:

Telephone:
+54 (11) 4373 4439

E-mail:
marketing.tc@morganplc.com

Asia:

Telephone:
+65 6595 0000

E-mail:
asia.mc@morganplc.com

Porextherm:

Porextherm
Dämmstoffe GmbH
Heisinger Straße 8/10
D-87437 Kempten

Telephone:
+ 49 (0)831 - 575360
Fax:
+ 49 (0)831 - 575363

The data presented in this leaflet are in accordance with the present state of our knowledge, but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product constants within the scope of technical progress or new developments. The recommendations made in this leaflet should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are also being used. The recommendations do not absolve the user from the obligation of investigating the possibility of infringement of third parties' rights and, if necessary, clarifying the position. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the product for a particular purpose.

Whilst the values and application information in this datasheet are typical, they are given for guidance only. The values and the information given are subject to normal manufacturing variation and may be subject to change without notice. Morgan Advanced Materials - Thermal Ceramics makes no guarantees and gives no warranties about the suitability of a product and you should seek advice to confirm the product's suitability for use with Morgan Advanced Materials - Thermal Ceramics.

Morgan Advanced Materials plc Registered in England & Wales at Quadrant, 55-57 High Street, Windsor, Berkshire SL4 1LP UK Company No. 286773

Data sheet

WDS® Flexipor®

Imperial information

Physical properties		
Colour		White
Nominal density pcf		17.48 - 21.85
Classification temperature °F		2012
Recommended temperature of use °F (core material)		1912
Linear shrinkage exposed on single side AAW 906-00 12hrs 1832°F		0.6
Linear shrinkage % 24hrs full soak	@1742°F @1832°F	1.7 3.6
Compressive strength MPa ASTM C165 @RT		0.607
Specific heat capacity kJ/kg·K DIN 51007 @1292°F		0.902
Thermal conductivity BTU·in./hr·ft ² ·°F ASTM C177	@68°F @392°F @752°F @1112°F @1472°F	0.15 0.16 0.19 0.24 0.32

The above data are only intended as a guide and should not be used in preparing specifications.

Contact

Europe:

Telephone:
+44 (0) 151 334 4030

E-mail:
marketing.tc@morganplc.com

North America:

Telephone:
+1 (706) 796 4200

E-mail:
northamerica.tc@morganplc.com

South America:

Telephone:
+54 (11) 4373 4439

E-mail:
marketing.tc@morganplc.com

Asia:

Telephone:
+65 6595 0000

E-mail:
asia.mc@morganplc.com

Porextherm:

Porextherm
Dämmstoffe GmbH
Heisinger Straße 8/10
D-87437 Kempten

Telephone:
+ 49 (0)831 - 575360
Fax:
+ 49 (0)831 - 575363

The data presented in this leaflet are in accordance with the present state of our knowledge, but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product constants within the scope of technical progress or new developments. The recommendations made in this leaflet should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are also being used. The recommendations do not absolve the user from the obligation of investigating the possibility of infringement of third parties' rights and, if necessary, clarifying the position. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the product for a particular purpose.



Whilst the values and application information in this datasheet are typical, they are given for guidance only. The values and the information given are subject to normal manufacturing variation and may be subject to change without notice. Morgan Advanced Materials - Thermal Ceramics makes no guarantees and gives no warranties about the suitability of a product and you should seek advice to confirm the product's suitability for use with Morgan Advanced Materials - Thermal Ceramics.

Morgan Advanced Materials plc Registered in England & Wales at Quadrant, 55-57 High Street, Windsor, Berkshire SL4 1LP UK Company No. 286773

Data sheet

WDS® Flexipor®

Thermal conductivity as a function of mean temperature

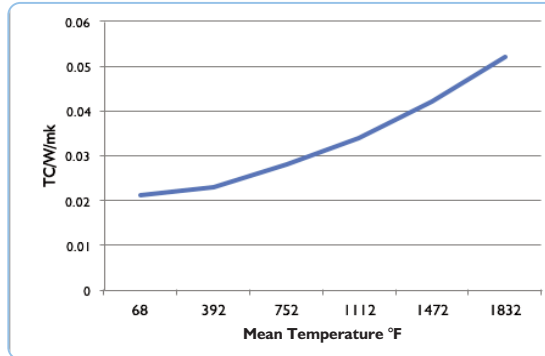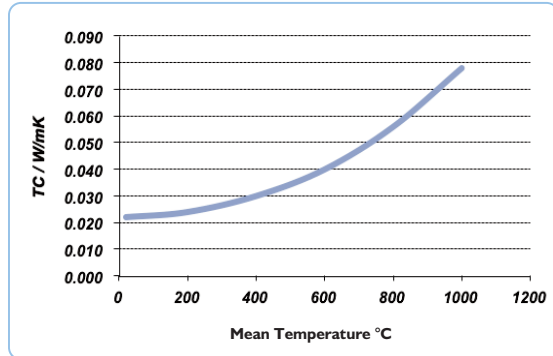

Contact

Europe:

Telephone:
+44 (0) 151 334 4030

E-mail:
marketing.tc@morganplc.com

North America:

Telephone:
+1 (706) 796 4200

E-mail:
northamerica.tc@morganplc.com

South America:

Telephone:
+54 (11) 4373 4439

E-mail:
marketing.tc@morganplc.com

Asia:

Telephone:
+65 6595 0000

E-mail:
asia.mc@morganplc.com

Porextherm:

Porextherm
Dämmstoffe GmbH
Heisinger Straße 8/10
D-87437 Kempten

Telephone:
+ 49 (0)831 - 575360
Fax:
+ 49 (0)831 - 575363

The data presented in this leaflet are in accordance with the present state of our knowledge, but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product constants within the scope of technical progress or new developments. The recommendations made in this leaflet should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are also being used. The recommendations do not absolve the user from the obligation of investigating the possibility of infringement of third parties' rights and, if necessary, clarifying the position. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the product for a particular purpose.

Whilst the values and application information in this datasheet are typical, they are given for guidance only. The values and the information given are subject to normal manufacturing variation and may be subject to change without notice. Morgan Advanced Materials - Thermal Ceramics makes no guarantees and gives no warranties about the suitability of a product and you should seek advice to confirm the product's suitability for use with Morgan Advanced Materials - Thermal Ceramics.

Morgan Advanced Materials plc Registered in England & Wales at Quadrant, 55-57 High Street, Windsor, Berkshire SL4 1LP UK Company No. 286773